


STAG I BR

Continuous brushing machine, can be equipped with up to 2 vertical stations




Grinding direction from right to left

Spindle

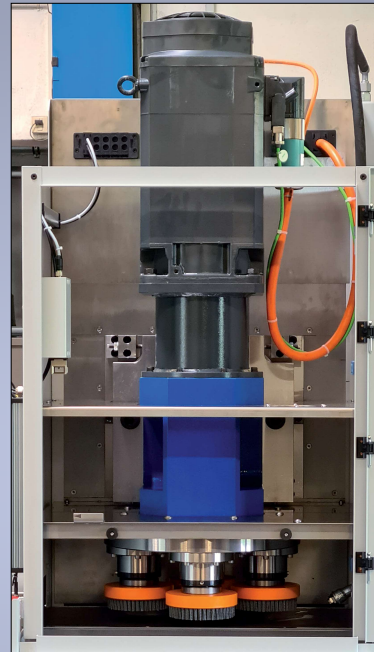

Demagnetizer

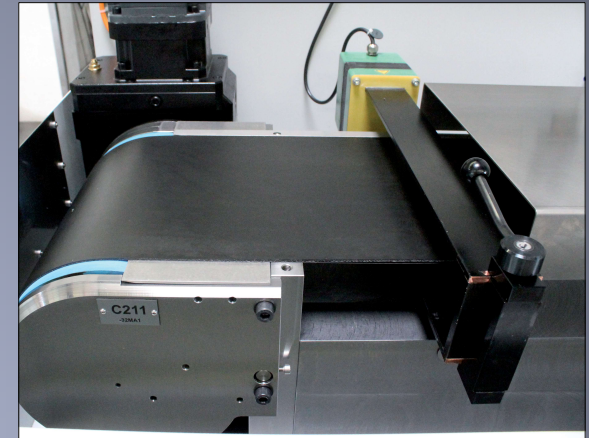

Brushing



Performances

- High performance spindles, direct drive
- Modular rigid steel frame combined with prestressed concrete
- Can be combined with up to 2 stations continuously
- Automatic, semi-automatic or manual loading

LINEAR ABRASIVE Engineering S.A.

Bellevue 5

2074 Marin / Switzerland

Phone: +41 (0)32 753 36 33 Fax: +41 (0)32 753 21 69

E-mail: commercial.center@linear.ch




LINEAR ABRASIVE

Technical specifications

Number of spindles	4	Width of machinable parts max. (mm)	180
Spindle (mm)	4x ø50x125	Height of machinable parts max. (mm)	80
Z-axis infeed (mm)	120	Abrasive tools	Brushes
Direct spindle drive (rpm)	planetary 0 - 200	Brushes (mm)	4x ø160 Al2O3, ceramic, diamond
Direct spindle drive (rpm)	brushes 0 - 2000	Infeed (mm/min)	0 - 6000
Ratio	1:10	Electrical control	Siemens S7/1200/TIA
Power (kW)	24	Total weight (t)	3

Examples:

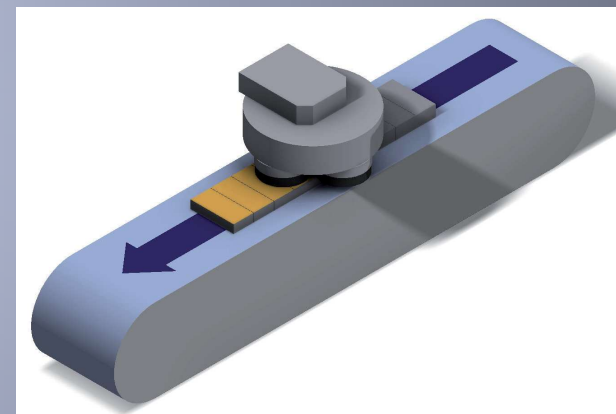

LINEAR ABRASIVE Engineering S.A.

Bellevue 5

2074 Marin / Switzerland

Phone: +41 (0)32 753 36 33 Fax: +41 (0)32 753 21 69

E-mail: commercial.center@linear.ch



LINEAR ABRASIVE